

7 inch IP65 1280x800 Touch Monitors

This product uses BOE original panel, comes with oncell touch function and AG glass surface、Optical Bonding,Patented IP65 Front. With 400 cd/m² and a resolution of 1280 * 800, the display effect is good. The product adopts an integrated aluminum casting process and can work stably at -20°C to 60°C. It supports 75 * 75mm vesa fixation and Openfarme fixation methods. Equipped with a power switch, wide voltage 12-24V DC input, HDMI 1.4 interface, and supports true Vertical display mode.

Features

- Strengthened cover glass, Patented IP65 Front
- 1280x800 resolution
- Anti-glare treatment
- Optical Bonding
- 10-finger-multi touch capacitive touch.
- Screwable connection for rugged environments.



Product Model

Product Size	7"
Capacitive touch	WT070S4

Product Interface



DC HDMI

USB



KEY

Product Specification

Screen Parameters

LCD size	7" TFT LCD
Resolution	1280*800
Viewing angle	160/160
Colour	16.7M
Brightness	400 cd/m ²
Contrast ratio	1000:1

Touch Parameters


Touch type	10-point touch Projection Capacitive
Transmittance	≥88%
Input mode	Handwriting or Capacitance pen
Controller communication	USB

Hardware configuration


AD board	WT070KM01
Key function	POWER
System language	Multilingual (default: English)

Accessory

1 x Power Cord	2 x Side bracket
1 x Adapter	1 x HDMI cable
1 x USB Cord	1 x Stand(optional)

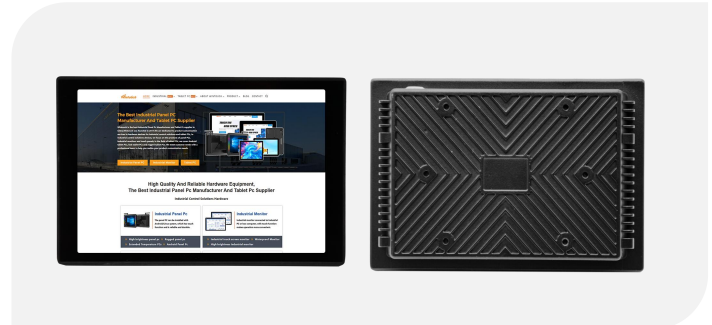

Product Size

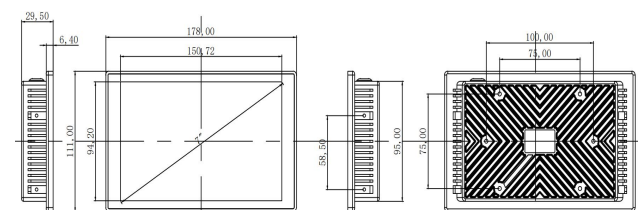

Physical Characteristics

Overall dimensions	W178.00x H111.00x D29.5mm
Display active screen	150.72x94.2mm

Product Reliability Parameters

Working temperature	-20°C~60°C
Storage temperature	-30°C~70°C
Relative humidity	Humidity: 95% Non-Condensing
Vibration protection	IEC 60068-2-64, Random, 5 ~ 500 Hz, 1 hr/axis
Impact protection	IEC 60068-2-27, Half sine wave, Lasting for 11ms
Product certification	CE (CCC/FCC/EMC/CB/ROHS Optional)
Waterproof grade	The front panel reaches IP65 protection level

Power Parameters

Power input	DC 12-24V 2.5A
Power Consumption	10W
Stand-By Consumption	0.5W

Interface Parameters

Power interface	1*DC, Support 12V-24V
HDMI	1*HDMI, Support HDMI data input
Touch interface	1*TOUCH (USB-A)

Pakeage

Package size(mm)	285*225*65
NW.	0.5KG
GW.	1KG