



10.4" Capacitive Touch Monitor


- Patented IP65 Front with silicon seal
- Strengthened cover glass
- Anti-glare treatment (chemical etching)
- 10-finger-multi touch capacitive touch
- LED backlight backed Panels in A+ quality
- Screwable connection for rugged environments

Wintouch's Capacitive Touch Monitor series has a modern sleek look with its flat edge to edge glass front panels, and a patented silicone rubberized seal making the front panels IP65 water- and dust proof.

This new series comes with capacitive 10-finger multitouch, glass front reaching Mohs 7, the glass surface is anti glare treated (chemical etched), a wide variety of connectors including USB-B for touch, HDMI, DVI-D, VGA and audio inputs, all lockable including the DC-IN. Each capacitive Touch Monitor has an A+ industrial LCD panel backed by Wintouch's 100% no dead pixel guarantee. Each monitor comes with its own desktop stand, and screw patterns on the back for VESA 75 or 100 mounts.


The high resolution support (e.g. 768p, 1920×1200 pixels) of these Wintouch touch devices make them the perfect choice for a wide variety of applications including POS systems, as control panels in industrial fields, in kiosk systems, for office/residence automation and many other areas.

The projected 10-point capacitive touch panel is accurate and responsive. The touch function is quickly established when connected via USB port. Wintouch includes touch drivers for popular OS (Win CE, XP, Vista, 7, 8, 10), Mac, Android and Linux. Normally, no touch driver needed for Win 7, 8 and 10. The virtual keyboard and Windows gesture makes Windows convenient to use. Besides, embedded systems, such as Raspberry.

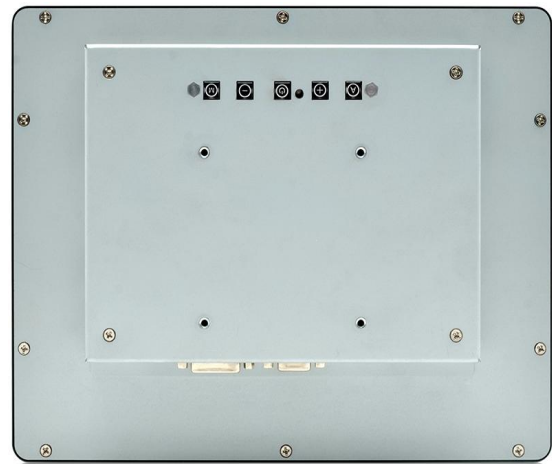

Product name	10.4" PCAP Touch Monitor
Anti-glare LCD Panel	
IP rated front panel	IP65
Screen diagonal (Inch/cm):	10.4/26.42
Display active screen size:	21.1x15.8
Aspect ratio:	4:3
Physical resolution:	1024*768
Colours displayed:	16.7M
Brightness (cd/m2):	300
Contrast:	800:1
Typical reaction time Tr/ Tf :	10/15 (ms)
Visual Angle horizontal/vertical :	160/140
Backlight / Backlight Lifetime	LED / 30,000


Operation / Mechanical	
Operating Temperature	-10 ~ +65 (°C)
Humidity Range (RH)	10%-90%
Net weight (kg)	1.1
Gross weight (kg)	2 (incl. cartonage)
Housing material	Metal and plastic
Housing (cm) LxWxH	25.23x19.49x4.2
Mounting	VESA 100/ VESA 75

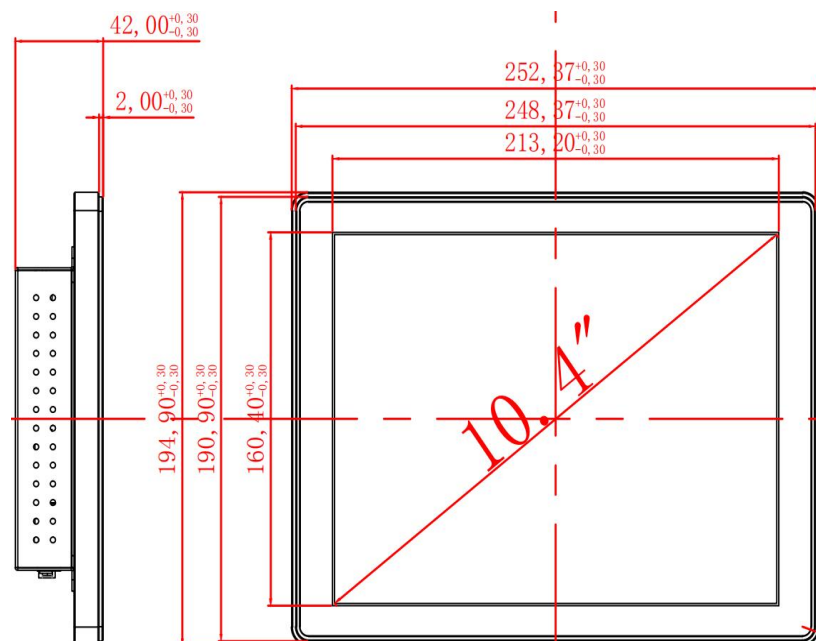

Model number	WT104B24
Touch Panel	
Touch Technology	Projected Capacitive 10-point Multitouch
Touch Connector	USB
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switch- ing; 12V DC-Out
Working Power (V)	12
Power Consumption (W)	10
Stand-By Consumption (W)	<1

External Connectors	
Video	1x VGA
	1x DVI-D
	1x HDMI 1.1 (incl. HDCP)
Audio	1x PC-Audio
Touch Connector	1x USB
Connectors	1x 12V DC-IN

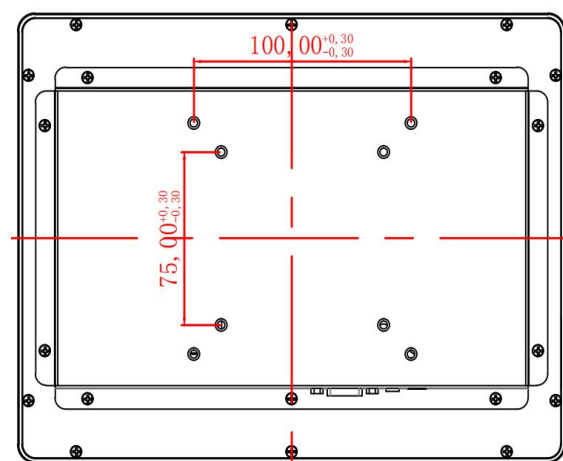

Corporate Headquarters

Sunny Yu

Email: Sunny@unitedtouch.cn

MP: +86 15800041166 Skype: Sunny@unitedtouch.cn

www.unitedtouch.en.alibaba.com www.wintouch.cc

Shenzhen United Touch Technology Company Co.,Ltd

3F, 1st Building , Boshi industrial park ,HuaKe zone,Shida Road ,Dalingshan,Dongguan , Guangdong Prov.,P.R.Ch